


## ALL IN II engineered



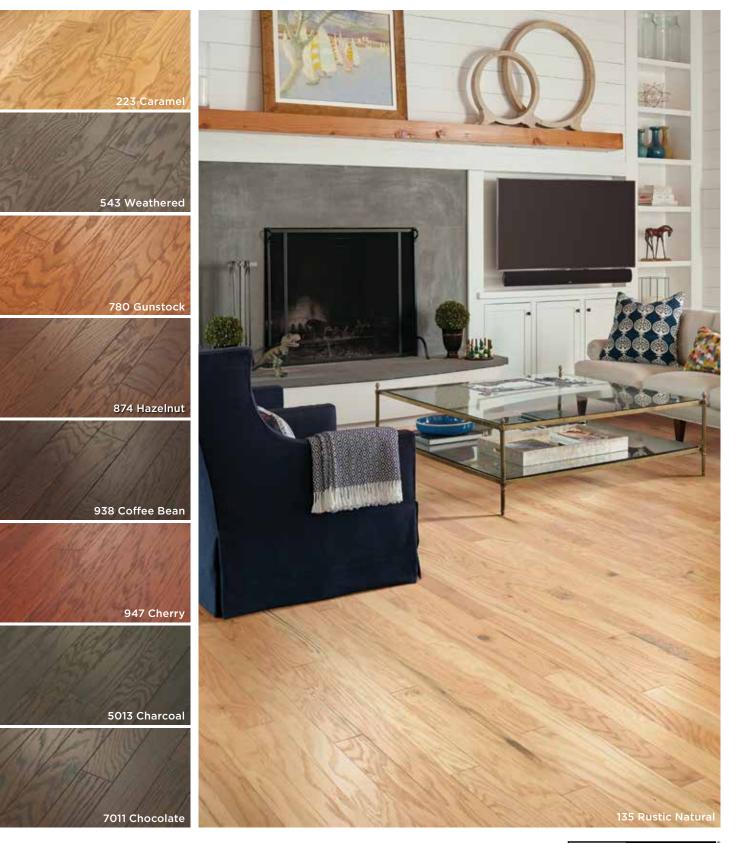

shawbuilderflooring.com 05.10.2017

## ALL IN II



**Builder Flooring** 

Style Number	HW581 HW582		
Construction	DURAS	DURAS	
Thickness	Nominal 3/8"	Nominal 3/8"	
Width	31/4"	5″	
Species	Red Oak	Red Oak	
Texture	Smooth	Smooth	
Gloss Level	20%	20%	
Janka Hardness Rating	1889	1889	
Edge Description	Microbeveled	Microbeveled	
End Description	Microbeveled	Microbeveled	
SF per carton	23.76	23.66	
SF per pallet	1,425.60	1,419.60	
Installation	Nail, Staple, Glue, Float	Nail, Staple, Glue, Float	
All measurements are nominal	Cartons may include random lengths		

## Features

- Classic hardwood flooring in both traditional and modern colors.
- Showcases the charm and natural beauty of hardwood, accentuated with a wide range of character.

## **Suggested Adhesive**

Style #	Style Name	Coverage	Moisture	Additional Features	
ADHESIVES					
HWA05	35MC — Urethane	35 SF / gal for moisture	No Moisture test required	Sound & crack suppressant	
		60 SF / gal as adhesive	Up to 5 lbs. or 85% RH		
111BA	3-in-1 Ultra - MS	35 SF per gal. for moisture	No Moisture test required	Sound & crack suppressant	
		70 SF per gal. as adhesive	Up to 5 lbs. or 85% RH		
HS303	DMC140 — Urethane	35 SF / gal for moisture	No Moisture test required		
HWADH	UreBond Plus	35 SF / gal for moisture	Up to 8 lbs. or 85% RH		
		60 SF / gal	Up to 5 lbs. or 85% RH		

We recommend that you use Shaw's adhesives to prolong the life, durability and performance of your beautiful new EPIC floor.

**Trim Pieces** length: 78" (\*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking — but are available through a quick-ship program. **Delivery should take approximately 2 to 3 weeks**.)



shawbuilderflooring.com 05.10.2017