

Colors shown 700 Patina





Shaw Industries, Inc. PO Drawer 2128, Mail Drop 02601 Dalton, GA 30722-2128 1-800-441-7429

Tile & Stone™

Features

A subtle design with touches of character, make Nepal a big standout. With its superb neutral colors and slight surface texture, Nepal is rugged enough for indoor and outdoor applications but versatile enough to work in any kitchen or bathroom.

- Limestone Visual
- Understated surface pitting
- PTCA Certified Porcelain
- Made in Turkey

Tile Sizes

Style
CS52J
CS53J

Trim

Bullnose CS54|

Accent

Mosaic CS55J


Technical

Wear Rating Group	4
Break Strength	407 lbs.
Water Absorption	< .5%
COF (Wet)	.6 >

Colors



Accents

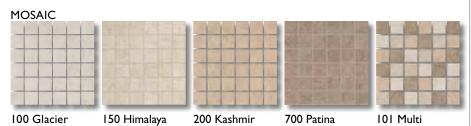

Grout Options

Grout Options				
for 100 Glacier	for 150 Himalaya	for 200 Kashmir	for 700 Patina	
Designer Grout				
	Commence of the last	STATE OF THE PARTY		
00D12 Navajo White	00D32 Light Taupe	00D25 Tumbleweed	0D153 Buckskin	
COORDINATING GROUT				
A		2000	The state of the s	
00D32 Light Taupe	00D12 Navajo White	00D21 Canvas	00D25 Tumbleweed	
Contrasting Grout				
			20 0 0	
0D153 Buckskin	0D153 Buckskin	0D153 Buckskin	00D21 Canvas	

This tile features random variations of shade and texture within each carton. To insure optimum appearance, it is imperative that tiles from various cartons be continually blended during installation. Placement of tiles should be decided on before beginning installation.

*OSHA (Occupational Safety and Health Administration) has established a recognized industry standard of 0.5 (wet and dry) for slip-resistant surfaces. The Americans with Disabilities Act (ADA) recommends, but does not require, "a Static Coefficient of Friction of 0.60 for accessible routes and 0.80 for ramps." ADA does not specifically state that 0.60 is both a dry and a wet requirement. It is important to note that any tile or other hard surface flooring can become slippery when wet or improperly maintained. Products installed in an exterior application must comply with applicable ANSI 108 series of the "American National Standard Specifications for the Installation of Ceramic Tile" and comply with TCA installation methods applicable to installation conditions..



Approved Usage





