



111 Ice



500 Alpine

Style Number	CS52J	CS53J	CS54J	CS55J
Construction	porcelain	porcelain	porcelain	porcelain
Tile Type	floor tile	floor tile	bullnose	mosaic
Tile Size	13" x 13"	18" x 18"	2.75" x 13"	13" x 13" x 2"
Technical				
Wear Rating Group	4	4	4	4
Break Strength	407	407	NA	NA
Water Absorption	< 0.50	< 0.50	< 0.50	< 0.50
DCOF	> 0.42	> 0.42	> 0.42	> 0.42
Shade Variation	V2	V2	V2	V2

A DCOF value of > 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of > 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com

MANUFACTURER'S WARNING:

- Tiles with DCOF Acutest values less than .42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, great and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.

- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

- For additional information, refer to [Factors to Consider](#).

- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Colors




100 Glacier

111 Ice

150 Himalaya

500 Alpine

CS55J mosaic

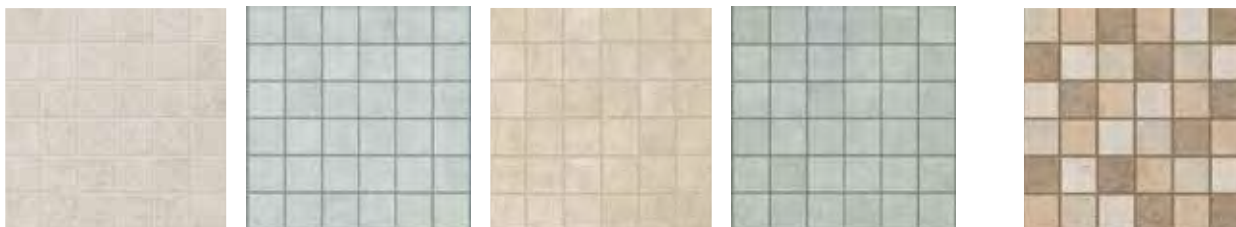

100 Glacier

111 Ice

150 Himalaya

500 Alpine

101 Multi

Benefits

