

Glass Essentials | glass tile



Glass Essentials

shawfloors.com


Features

Glass Essentials... dynamic design in glass.


- Offers high style in nine gem-like glass colors
- Use it indoors or out, for accents or entire walls, or in combination with other types of tile
- Provides a strong architectural element that can be contemporary or traditional, intricate or dynamic

Colors


IxI Square CS57D 12" x 12" sheet

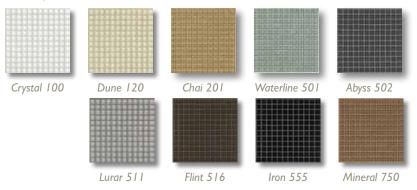

3x6 CS581

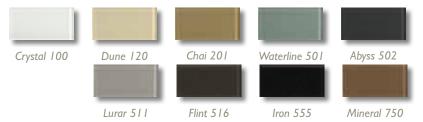

Random Linear CS59| 12" x 12" sheet

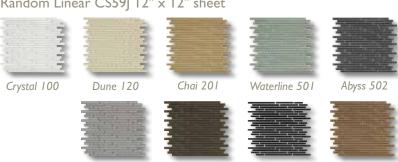

Flint 516

Tile Sizes

Wall Tile

 $3" \times 6"$ **CS58**] **Thickness** 5/16" Box Quantity 20 pieces

Accents

(all mosaics cover approximately I square foot)

12" × 12" Mosaic Squares	CS57D
Thickness	5/16"
Box Quantity	II pieces

12" × 12" Random Linear	CS59J
Thickness	5/16"
Box Quantity	11 pieces

Technical

Water Absorption <.01% Color Variation Low



Integra Color Grout CS95E

All-in-One Thin Set Adhesive and Grout for Glass Tile Installations

Shaw suggests installing this and other glass products with Merkrete's Integra all-in-one thinset and grout. It is an excellent solution for setting glass and mosaics on backsplashes and in other applications, resulting in a faster and cleaner installation

Product Description

BASIC USE: Merkrete Integra mortar's both a thin set adhesive and grout for installing glass tile on walls and floors.

Technical Data

Applicable Standards: Integra meets or exceeds industry requirements ANSI All8.4 for latex portland cement mortar. Follow ANSI A108.5 for installation. ANSI A118.6 for portland cement grout and ANSI AI18.7 polymer modified cement grout. Follow the TCA Handbook and ANSI A108.10-1999 Installation of Grout in Tile work.

Products installed in an exterior application must comply with applicable ANSI 108 series of the "American National Standard Specifications for the Installation of Ceramic Tile" and comply with TCA installation methods applicable to installation conditions.

Approved Usage





Lurar 511

Iron 555

Mineral 750