

Color shown on backsplash is 501 Waterline





# Tile & Stone™

Shaw Industries, Inc. PO Drawer 2128, Mail Drop 02601 Dalton, GA 30722-2128 1-800-441-7429

## Glass Essentials


### **Features**

Glass Essentials... dynamic design in glass.

- Offers high style in nine gem-like glass colors
- Use it indoors or out, for accents or entire walls, or in combination with other types of tile
- Provides a strong architectural element that can be contemporary or traditional, intricate or dynamic

### Colors

IxI Square CS57D 12" x 12" sheet

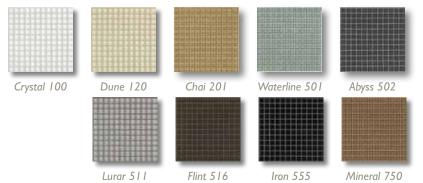


#### 3x6 CS581



#### Random Linear CS59| 12" x 12" sheet

Lurar 511

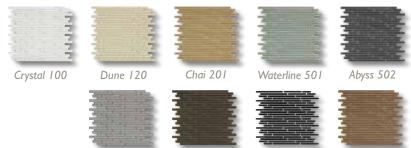

Flint 516

## Tile Sizes

#### Wall Tile

 $3" \times 6"$ CS58| Thickness 5/16" Box Quantity 20 pieces

#### **Mosaics Tile**

(all mosaics cover approximately 1 square foot)

12" x 12" Mosaic Squares	CS57D
Thickness	5/16"
Box Quantity	11 pieces

12" × 12" Random Linear CS591 Thickness 5/16" Box Quantity II pieces

#### **Technical**

Water Absorption <.01% Color Variation Low



## **Integra Color Grout CS95E**

All-in-One Thin Set Adhesive and Grout for Glass Tile Installations

Shaw suggests installing this and other glass products with Merkrete's Integra all-in-one thinset and grout. It is an excellent solution for setting glass and mosaics on backsplashes and in other applications, resulting in a faster and cleaner installation

#### **Product Description**

BASIC USE: Merkrete Integra mortar's both a thin set adhesive and grout for installing glass tile on walls and floors.

#### **Technical Data**

Applicable Standards: Integra meets or exceeds industry requirements ANSI AII8.4 for latex portland cement mortar. Follow ANSI A108.5 for installation. ANSI A118.6 for portland cement grout and ANSI AII8.7 polymer modified cement grout. Follow the TCA Handbook and ANSI A108.10-1999 Installation of Grout in Tile work.

Products installed in an exterior application must comply with applicable ANSI 108 series of the "American National Standard Specifications for the Installation of Ceramic Tile" and comply with TCA installation methods applicable to installation conditions.

## Approved Usage





Iron 555

Mineral 750