



Color shown on floor is 701 Noce with color 200 Beige on backsplash and rhomboid mosaic in alcove above stovetop in color 701.

Shaw Tile & Stone™
shawfloors.com

Lunar | *porcelain tile*

Green.
It's something we never forget.





Tile & Stone™

shawfloors.com

Shaw Industries, Inc.
PO Drawer 2128, Mail Drop 02601
Dalton, GA 30722-2128
1-800-441-7429

Lunar

Features

- Designed in Italy and made in the USA, Lunar is a line unique to Shaw
- This tile collection, a dramatic design, is inspired by images of the moon's surface
- Randomness is achieved by advanced technology and numerous glazing steps—for a look that's very natural
- Four colors, each with light to dark movement across the tile, echo the natural palette of stone
- This product was manufactured with conscientious environmental practices in mind and contains 40% post-industrial recycled content
- Modular design series in 12" x 12", 18" x 18", 6" x 6", and 3" x 6" tiles with 2" x 2" mosaics and rhomboid mosaics

Colors



200 Beige



700 Walnut



701 Noce



702 Graphite

Accents


Listello



Listello Corner



Rhomboid Mosaic

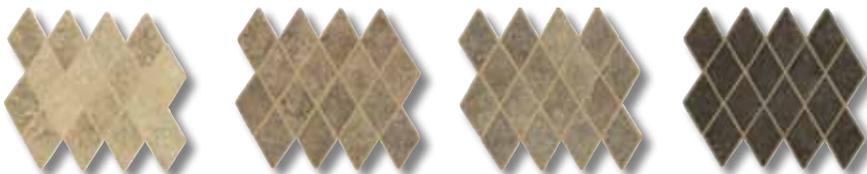

Tile Sizes

Field Tile	Style
12" x 12"	CS60C
18" x 18"	CS61C
6" x 6"	CS62C
3" x 6"	CS93C
Trim	
3" x 12" Bullnose	CS63C
Accent	
12" x 12" Mosaic	CS64C
12" x 12" Rhomboid Mosaic	CS65C
2" x 12" Listello	CS37D
2" x 2" Listello Corner	CS38D

Technical

Wear Rating Group	4
Break Strength	400 lbs.
Water Absorption	<.5%
COF (Wet)	.60

This tile features random variations of shade and texture within each carton. To insure optimum appearance, it is imperative that tiles from various cartons be continually blended during installation. Placement of tiles should be decided on before beginning installation.

*OSHA (Occupational Safety and Health Administration) has established a recognized industry standard of 0.5 (wet and dry) for slip-resistant surfaces. The Americans with Disabilities Act (ADA) recommends, but does not require, "a Static Coefficient of Friction of 0.60 for accessible routes and 0.80 for ramps." ADA does not specifically state that 0.60 is both a dry and a wet requirement. It is important to note that any tile or other hard surface flooring can become slippery when wet or improperly maintained. Products installed in an exterior application must comply with applicable ANSI 108 series of the "American National Standard Specifications for the Installation of Ceramic Tile" and comply with TCA installation methods applicable to installation conditions.

Approved Usage



Lunar | porcelain tile

Green.
It's something we never forget.

