

TILE & STONE

PETRIFIED HICKORY

porcelain



500 Relic



700 Fossil



600 Ancient



775 Timeworn

Style Number	CS36M	CS65K	CS62Q	CS56Q
Construction	porcelain	porcelain	porcelain	porcelain
Tile Type	floor tile	floor tile	bullnose	mosaic
Tile Size	6" x 36"	6" x 24"	3" x 24"	12" x 12" x 2"

Technical

Wear Rating Group	Multiple*	Multiple*	Multiple*	Multiple*
Break Strength	400 lbs.	400 lbs.	400 lbs.	400 lbs.
Water Absorption %	0.5	0.5%	0.5	0.5
Pre-consumer Recycled Content	40%	40%	40%	40%
DCOF	> 0.42	≥ 0.42	> 0.42	> 0.42
Shade Variation	V3	V3	V3	V3
Installation Area	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors	Floors, Walls, Exteriors

* colors 700 and 775 - 3; all other colors - 4. Wear rating 3 not suggested for exterior applications.

A DCOF value of > 0.42 is the new standard for tiles specified for commercial application in standard A1371-2012, Section 9.6. It replaces the SCOF value of > 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com

MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than .42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Colors



500 Relic
weathered driftwood gray



600 Ancient
rusty, red-toned brown


CS56Q mosaic




500 Relic



600 Ancient

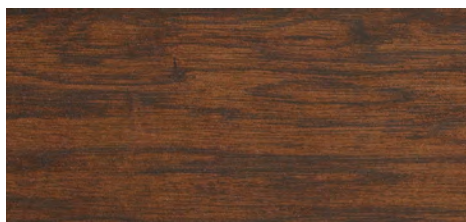

700 Fossil*
drenched dark brown

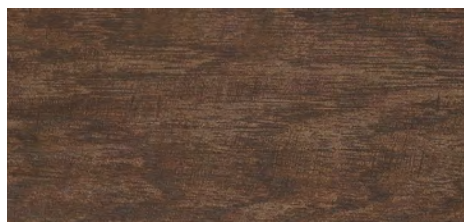

775 Timeworn*
like a steamy cup of black coffee



700 Fossil*



775 Timeworn*



CLARITY
digital imaging



MADE IN THE USA

