


Vicksburg | engineered



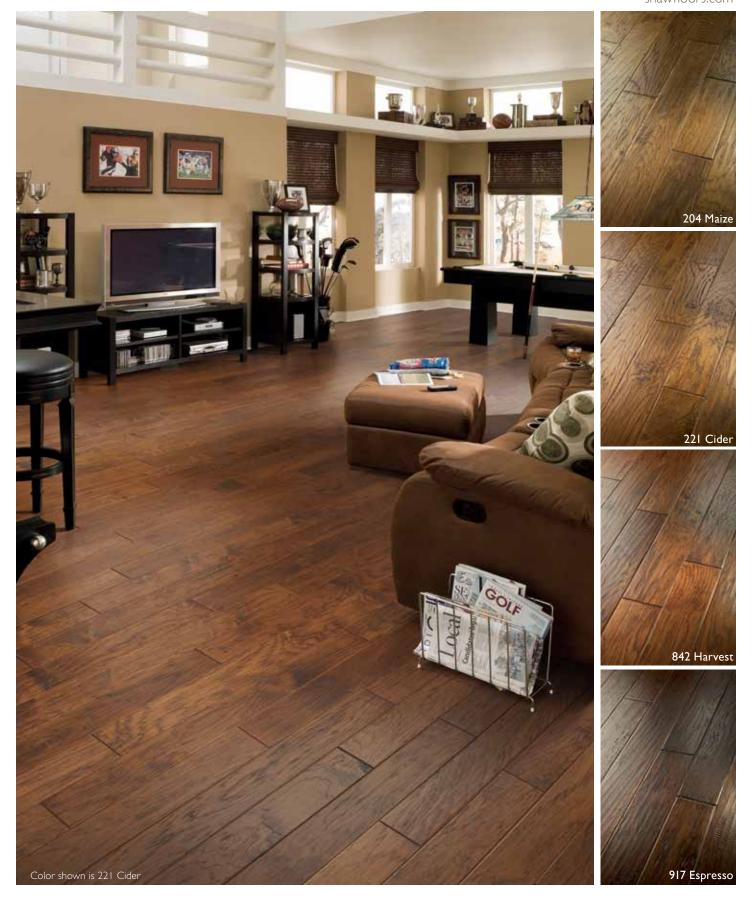

Features

This stunning handscraped engineered hardwood flooring features hickory planks that are further enhanced with hand-applied 'chatter marks' giving each plank its unique character.

- Beveled edges and ends give a sleek finish to this I/2" × 5" engineered product, and the 5-ply construction ensures durability
- 5-star, with limited 50-year wear warranty
- This Shaw product can be installed above, on or below ground level
- This Shaw hardwood is protected by ScufResist[™] PLATINUM finish

SW853

Flush Stairnose

- Installation methods: nail, staple, glue, float
- Made with Pride by Shaw in the USA

Trim Pieces when ordering please include color number



SW852 Flush Reducer



TMH78 T-Molding



LTH78 Threshold / Carpet Reducer



Quarter Round

Suggested Adhesive

- HS091 Shaw 4-in-1 Urethane Adhesive – Slab moisture up to 85% RH / 12 lbs
- HS097 Shaw 3-in-1 MS Adhesive – Slab moisture up to 90% RH / 15 lbs
- HS105 Shaw 35MC Urethane Adhesive – Slab moisture up to 90% RH / 15 lbs
- SWADH Shaw UreBond Plus Urethane Adhesive – Slab moisture up to 80% RH / 8 lbs

- HS090 Shaw EcoMade Resin Adhesive – Slab moisture up to 75%RH / 3 lbs
- HS096 Shaw 70 Adhesive Resin Adhesive – Slab moisture up to 75%RH / 3 lbs
- TNGAD Shaw Tongue and Groove Adhesive – Formulated for floating installations

Specifications

Style

/	• · · · · •
Thickness	1/2" (12.9mm)
Width	5"
Species	Hickory
Texture	Heavy Scraped
Gloss Level	20%
Janka Hardness Rating	1657
Edge Description	Beveled
End Description	Beveled
Sq. Ft. per Carton	26.01
Sq. Ft. per Pallet	1,014.39

*Cartons may include random lengths

SWI18



This Shaw hardwood is warranted that the face surface of this product will not peel off or wear through for 50 years from the date of purchase.

H E A T APPROVED

This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct gluedown is NOT recommended!

ScufResist

This product features ScufResist™ PLATINUM – Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



This hardwood is rated High color and character variation with distinguishable and often extreme color variation within each box. It is *imperative* that hardwood planks from various cartons be continually blended during installation to ensure optimum appearance.



This Shaw hardwood meets the GREENGUARD indoor air quality requirements and is GREENGUARD Certified.

This Shaw hardwood is Cradle to Cradle[™] Silver Certified.



This Shaw product can be installed above, on or below ground level.



This Shaw product is Made in the U.S.A.