

TILE & STONE

PETRIFIED HICKORY

porcelain



500 Relic



700 Fossil, TGH45 Listello Slate Mosaic color 650 on the wall



600 Ancient



775 Timeworn

PETRIFIED HICKORY

TILE & STONE

Style Number	CS65K	CS36M	CS62Q	CS56Q
Construction	porcelain	porcelain	porcelain	porcelain
Tile Type	floor tile	floor tile	bullnose	mosaic
Tile Size	6" X 24"	6" X 36"	3" X 24"	12" X 12" X 2"

Technical

Wear Rating Group	4, 3*	4, 3*	4, 3*	4, 3*
Break Strength	400 lbs.	400 lbs.	400 lbs.	400 lbs.
Water Absorption	0.5	0.5	0.5	0.5
DCOF	> 0.42	> 0.42	> 0.42	> 0.42
Shade Variation	V2	V2	V2	V2

*Colors 700 & 775 only

A DCOF value of > 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of > 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com

MANUFACTURER'S WARNING:


- Tiles with DCOF Acutest values less than .42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, great and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.

-Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

-For additional information, refer to [Factors to Consider](#).

- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Colors

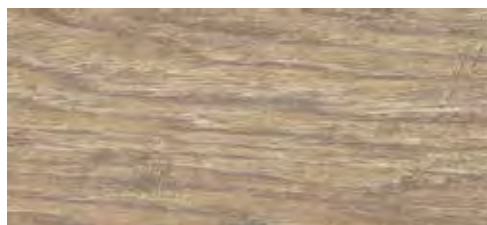

500 Relic
weathered driftwood gray




600 Ancient
rusty, red-toned brown

CS56Q mosaic




500 Relic


600 Ancient

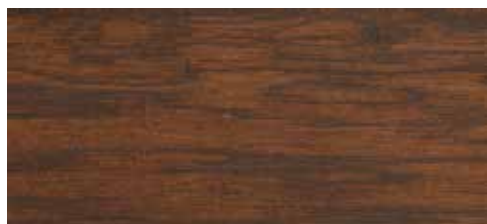

700 Fossil
drenched dark brown

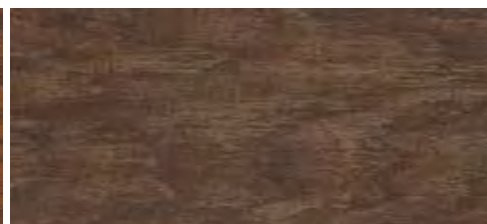

775 Timeworn
like a steamy cup of black coffee

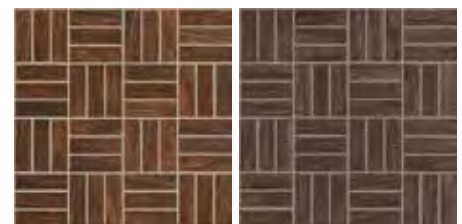

700 Fossil

775 Timeworn

Benefits



shawfloors.com
11.28.2016

CERTIFIED
PORCELAINTM
TILE
0.5% or less water absorption

Shaw[®]
FLOORS